

ORWAK

FLEX 5030-NHD

FLEX

THIS SPECIAL VERSION OF THE ORWAK

FLEX 5030 provides you with a safe way of compacting hazardous waste directly into drums.



Safety



Orwak benefits

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.



Why Orwak Flex?

- + Versatile compaction for many different application areas
- + Hygienic and safe compaction and disposal of mixed or hazardous waste
- + Special solutions for special needs

ORWAK FLEX 5030-N HD

Safe waste handling

ORWAK FLEX 5030-N HD IS OPTIMIZED FOR:

OTHER MATERIAL

+ Hazardous waste

ORWAK FLEX 5030-N HD, a robust and reliable compactor, the handling, transportation and disposal of chemical waste becomes safe and simple. It compacts hazardous waste, such as glass and cans/tins containing residual paint, oil or chemicals directly into drums.

HIGH COMPACTION RATIO ON THE SPOT

The 5030-N HD is a compact machine with a small footprint, but even though it requires little space, it still offers a high compaction ratio of up to 10:1!

STEEL PALLET

A steel pallet is included for stable placement of the drum inside the compactor. The operator effortlessly handles the heavy-duty steel pallets using a standard pallet lifter.

Standard drums can be used for storage and transport of the hazardous waste. Sorting is possible by using several drums.



USER FRIENDLY

It is easy to feed material into the open top-loading unit. The compactor is safe and simple to operate.




DIMENSIONS & SPECIFICATIONS

DIMENSIONS ORWAK FLEX 5030-N HD

| A | B | C | D | E |
|---------|--------|---------|---------|---------|
| 2165 mm | 850 mm | 1290 mm | 2030 mm | 1320 mm |

ENERGY CONSUMPTION

| STANDBY MODE | MAXIMUM OPERATION ONE HOUR |
|--------------|----------------------------|
| --- | 660 W/H |

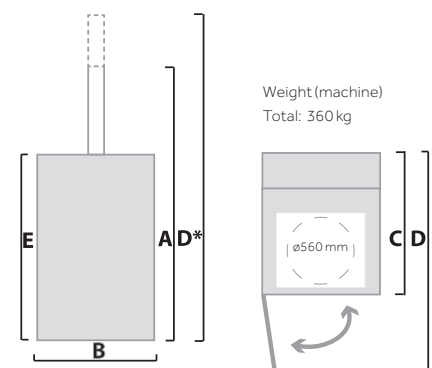

TECHNICAL SPECIFICATIONS

| LOADING APERTURE | CYCLE TIME | PRESS FORCE | DRUM SIZE | NOISE LEVEL | PROTECTION CLASS | OPERATING POWER |
|------------------|------------|--------------|-----------------------------------|-------------|------------------|------------------------------------|
| ø 560 mm | 36 secs | 3 ton, 30 kN | Width: ø600 mm Height: 1005 mm | 70 db (A) | IP 55 | Single phase 230 V, 50 Hz, 10 A |

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

Kalmec Export AB - Manufacturers Repr. Middle East
Polhemsgatan 1
S-392 39 Kalmar
SWEDEN
Tel: +46-48085900
Fax: +46-48017250
E-mail: hq@kalmec.com

