

ORWAK MULTI 5070-COMBI

MULTI

THE ORWAK MULTI 5070-COMBI is a baler and an in-bin compactor in the same machine. It is a versatile all-round solution that takes care of both the bagged mixed waste and your recyclable packaging material.



Versatile



50 KG
BALE WEIGHT
CARDBOARD

Orwak benefits

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.




Why Orwak Multi?

- + Sorting and compaction of several waste types at source
- + Top-loading of the material in open chambers
- + Total freedom to increase capacity by adding additional chambers

ORWAK

MULTI 5070-COMBI

All-round solution

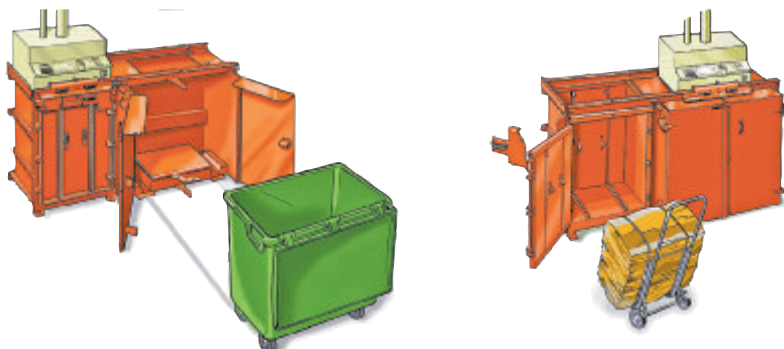

ORWAK MULTI 5070-COMBI IS OPTIMIZED FOR:

PAPER

+ Paper sacks
+ Cardboard
+ Shredded paper

PLASTIC FOIL

+ Shrink film
+ Plastic bags

OTHER METALS

+ Steel straps

OTHER PLASTICS

+ Plastic straps

SEMI-DRY WASTE

+ Bagged general waste

EXTENDABLE SYSTEM

Add an additional chamber to extend your sorting and compaction station!

DESIGNED FOR STANDARD BINS

It is suitable for most standard wheeled bins of 660 litres.

BALE TROLLEY

The 5070-COMBI is always delivered with a trolley for easy baling and internal transportation of the bale.

DUAL FUNCTION UNIT

When you opt for the 5070-COMBI, you get a baler for recyclables and an in-bin compactor in the same machine!

USER-FRIENDLY

The top-loading multi-chamber unit is simple to operate and convenient to feed with new material.

VERSATILE


It takes care of both dry and semi-wet waste as well as baling cardboard boxes, paper and plastics.

DIMENSIONS & SPECIFICATIONS

DIMENSIONS

A	B	C	D	E	
660 L/400L	660 L/400L	660 L/400L	660 L/400L	660 L/400L	
2265/2315 mm	2550/1960 mm	920/808 mm	1675/1733 mm	1325/1333 mm	
		1011/899 mm*			

*Including strap holders

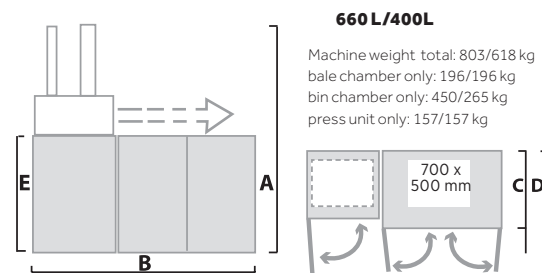

TECHNICAL SPECIFICATIONS

LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 700 mm Height: 500 mm	36 secs	3 ton, 30 kN	Width: 700 mm Depth: 500 mm Height: 700 mm	Cardboard: Up to 50 kg Plastic: Up to 80 kg	< 70 db (A)	IP 55	Single Phase 230 V, 50 Hz, 10 A

All dimensions and specifications are for one bale chamber and one bin chamber. For other combinations, please contact us. We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

Kalmec Export AB - Manufacturers Repr. Middle East
Polhemsgatan 1
S-392 39 Kalmar
SWEDEN
Tel: +46-48085900
Fax: +46-48017250
E-mail: hq@kalmec.com

ORWAK
KALMEC
Export AB